N5 - UK Roof and Wall Panel

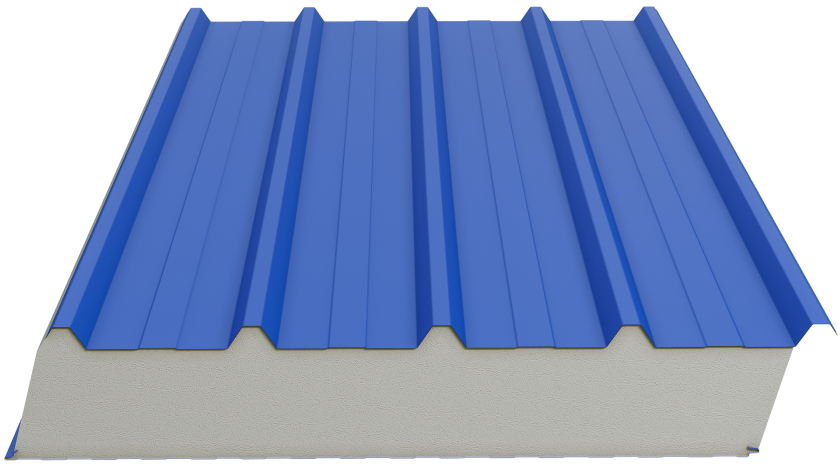

Product Information

It has 5 ribs which is lateral connected sandwich panel. Its biggest advantage is that it enables fast assembly thanks to lateral connected panel connection. This product enables wide gaps to be passed safely with its indented form. It has a joint detail with angle.

Production Plant

UK

Product Application

- Industrial Buildings
- Military Buildings
- Public Buildings
- Agricultural Buildings
- Sports Facilities
- Construction Site Buildings
- Silos
- Hypermarkets
- Shopping Centers
- Storehouse Halls
- Administrative Buildings

and all other concrete structures with steel or prefabricated load bearing systems.

02/2026

Performance Advantages

It has the perfect fire resistance values.
It has a joint detail with angle
Fast and trouble-free installation saves both time and labor.
It has high performance in sound insulation as well as heat insulation.
Thanks to its colorful surface, there is no need for additional coatings such as plaster or paint.
There are surface paint (Polyester, PvdF, Plastisol, PVC) options suitable for the place of use.
Color selection can be made from the RAL catalogue.
It does not deteriorate, rot or mold over time.

Cross Section

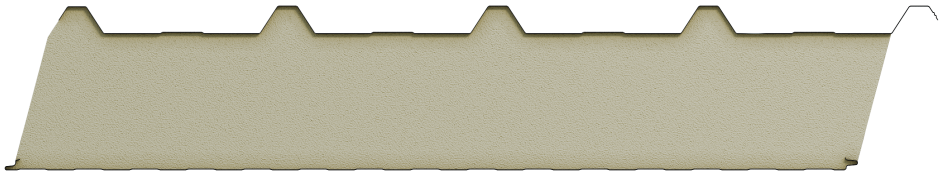

Thickness: 40-50-60-80-100-120-140-160-180-200 mm

Modular Width	1,000 mm
Minimum Length	2 meters
Maximum Length	Depends on transport conditions.

SmartCore – PIR Properties

Density (EN 1602)	PIR: 40 (± 2) kg/m^3 & SmartCore: 41 (± 2) kg/m^3
Thickness	40-50-60-80-100-120-140-160-180-200 mm
Thermal Conductivity (EN 13165)	PIR: 0.022-0.024 W/mK & SmartCore: 0.018-0.019 W/mK
Reaction to Fire (13501)	PIR: B-s2,d0 & SmartCore: B-s2,d0

Thermal Conductivity Table for SmartCore Panels

Panel Thickness	U Thermal Conductivity (W/m²K)	R Thermal Resistance (m²K/W)	R Thermal Resistance (ft2 ºF h/Btu)
40 mm	0,43	2,350	13,343
50 mm	0,35	2,880	16,353
60 mm	0,29	3,400	19,305
80 mm	0,22	4,460	25,324
100 mm	0,18	5,510	31,286
120 mm	0,15	6,560	37,248
140 mm	0,13	7,610	43,210
160 mm	0,12	8,670	49,228
180 mm	0,10	9,720	55,190
200 mm	0,09	10,770	61,152

According to EN 14509

Thermal Conductivity Table for PIR Panels

Panel Thickness	U Thermal Conductivity (W/m²K)	R Thermal Resistance (m²K/W)	R Thermal Resistance (ft2 ºF h/Btu)
40 mm	0,51	1,970	11,186
50 mm	0,42	2,400	13,627
60 mm	0,35	2,840	16,126
80 mm	0,27	3,710	21,065
100 mm	0,22	4,570	25,948
120 mm	0,18	5,440	30,888
140 mm	0,16	6,310	35,828
160 mm	0,14	7,180	40,768
180 mm	0,12	8,050	45,708
200 mm	0,11	8,920	50,648

According to EN 14509

Metal Surfaces

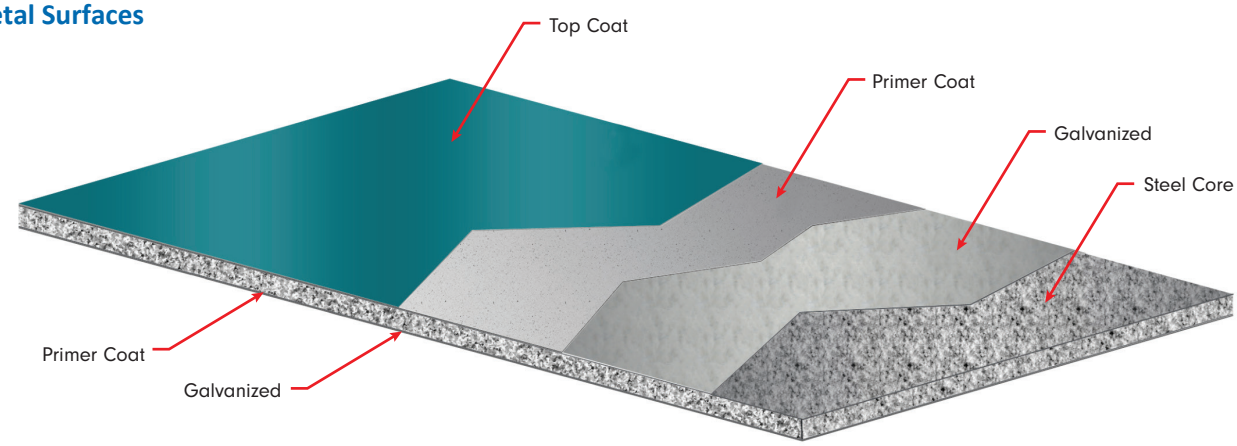

Prepainted Galvanized Steel Surface

Metal Type	t℠ŜLJI·ƛyűŜŘ DI·tØI·yƛÎŜŘ {űŜŜf
External Facing Thickness	л⌽50πл⌽yл ϒϒ
Internal Facing Thickness	л⌽40πл⌽yл ϒϒ
Thickness Tolerance (EN 10143)	b₴ϒƛyl·f
Steel Quality (EN 10327)	{ Grade (S220GD+Z, S250GD+Z, S280GD+Z, S320GD+Z, S350GD+Z)
Paint Type	t₴fèŜăűŜ℠ tØŘCΣ tfl·ăűƛă₴f

Tolerance Values

Panel Length	Panel Thickness	Panel Cover Width	Rectangularity
If L < = 3,000 mm ± 5 mm; If L > 3,000 mm ± 10 mm	D ≤ 100 mm ± 2 mm	± 2 mm for all profiles	s ≤ 0.6% of the nominal cover thickness (w). / (Width x 0.006)

Standard Package

Thickness (mm)	40	50	60	80	100	120	140	160	180	200
Quantity	20	18	14	10	9	8	7	6	5	4

Joint Details

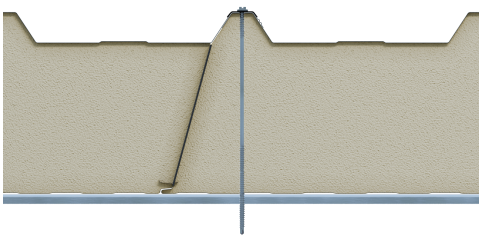

AssanPanel

NOVA 5 (PIR) ROOF PANEL LOAD SPAN TABLE

SINGLE SPAN

Core Thickness (mm)	Load Type kN/m²	Span length (L) (m)															
		1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
40	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	2,75	2,09	1,67	1,38	1,16	1,16	0,87	0,76	0,67	0,51	0,39	0,30	-	-	-	-
	Suction (kN/m²)	-4,21	-3,31	-2,46	-1,80	-1,39	-1,11	-0,92	-0,77	-0,66	-0,57	-0,50	-0,44	-	-	-	-
50	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,03	2,35	1,92	1,61	1,37	1,19	1,04	0,93	0,82	0,73	0,60	0,47	0,37	0,29	-	-
	Suction (kN/m²)	-4,87	-3,91	-2,84	-2,10	-1,62	-1,30	-1,06	-0,90	-0,77	-0,67	-0,59	-0,52	-0,47	-0,42	-	-
60	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,31	2,62	2,16	1,84	1,59	1,39	1,23	1,09	0,99	0,89	0,80	0,67	0,54	0,44	0,35	0,28
	Suction (kN/m²)	-5,55	-4,42	-3,22	-2,39	-1,85	-1,49	-1,22	-1,03	-0,89	-0,77	-0,67	-0,60	-0,54	-0,48	-0,44	-0,40
80	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,87	3,15	2,66	2,31	2,03	1,81	1,62	1,45	1,31	1,19	1,08	0,99	0,90	0,79	0,66	0,55
	Suction (kN/m²)	-6,64	-5,11	-3,99	-2,98	-2,32	-1,87	-1,54	-1,29	-1,11	-0,97	-0,85	-0,75	-0,67	-0,61	-0,55	-0,50
100	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,43	3,68	3,17	2,79	2,48	2,23	2,02	1,83	1,66	1,51	1,38	1,26	1,15	1,05	0,98	0,87
	Suction (kN/m²)	-7,51	-5,83	-4,76	-3,57	-2,79	-2,25	-1,85	-1,56	-1,33	-1,16	-1,01	-0,91	-0,81	-0,73	-0,66	-0,60
120	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,99	4,21	3,68	3,27	2,94	2,66	2,42	2,21	2,01	1,84	1,68	1,54	1,42	1,30	1,20	1,10
	Suction (kN/m²)	-8,40	-6,57	-5,40	-4,16	-3,26	-2,63	-2,17	-1,83	-1,56	-1,35	-1,19	-1,05	-0,95	-0,85	-0,77	-0,70
150	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5,83	5,02	4,45	4,01	3,64	3,32	3,04	2,78	2,55	2,35	2,16	1,98	1,83	1,68	1,55	1,44
	Suction (kN/m²)	-9,75	-7,69	-6,35	-5,05	-3,96	-3,20	-2,64	-2,23	-1,90	-1,65	-1,44	-1,28	-1,14	-1,03	-0,94	-0,85
170	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	6,38	5,56	4,97	4,50	4,11	3,76	3,45	3,17	2,92	2,69	2,47	2,28	2,10	1,94	1,79	1,66
	Suction (kN/m²)	-10,67	-8,45	-7,00	-5,64	-4,43	-3,58	-2,96	-2,49	-2,13	-1,85	-1,62	-1,43	-1,28	-1,15	-1,04	-0,95

DOUBLE SPAN



Core Thickness (mm)	Load Type kN/m²	Span length (L) (m)															
		1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
пл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	2,75	2,09	1,67	1,38	1,16	0,97	0,81	0,69	0,59	-	-	-	-	-	-	-
	Suction (kN/m²)	-4,16	-3,06	-2,38	-1,80	-1,39	-1,11	-0,92	-0,77	-0,66	-	-	-	-	-	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
рл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,03	2,35	1,92	1,53	1,23	1,02	0,87	0,74	0,64	0,56	-	-	-	-	-	-
	Suction (kN/m²)	-4,87	-3,91	-2,84	-2,10	-1,62	-1,30	-1,06	-0,90	-0,77	-0,67	-	-	-	-	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
сл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,31	2,62	2,04	1,60	1,30	1,08	0,93	0,80	0,69	0,60	-	-	-	-	-	-
	Suction (kN/m²)	-4,68	-3,51	-2,76	-2,26	-1,85	-1,49	-1,22	-1,03	-0,89	-0,77	-	-	-	-	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
ул	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,87	2,89	2,20	1,75	1,43	1,20	1,02	0,89	0,78	0,68	0,60	0,54	-	-	-	-
	Suction (kN/m²)	-5,17	-3,92	-3,12	-2,56	-2,16	-1,86	-1,54	-1,29	-1,11	-0,97	-0,85	-0,75	-	-	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
млл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,21	3,07	2,36	1,89	1,56	1,31	1,12	0,98	0,86	0,76	0,67	0,60	0,54	-	-	-
	Suction (kN/m²)	-5,63	-4,31	-3,45	-2,85	-2,41	-2,08	-1,82	-1,56	-1,33	-1,16	-1,01	-0,91	-0,81	-	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
мнл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,41	3,24	2,51	2,02	1,67	1,41	1,21	1,05	0,94	0,83	0,74	0,66	0,59	0,54	-	-
	Suction (kN/m²)	-6,06	-4,68	-3,77	-3,12	-2,65	-2,29	-2,01	-1,79	-1,56	-1,35	-1,19	-1,05	-0,95	-0,85	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
мрл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,69	3,49	2,73	2,21	1,84	1,56	1,34	1,17	1,02	0,93	0,83	0,74	0,67	0,61	0,55	-
	Suction (kN/m²)	-6,66	-5,19	-4,21	-3,50	-2,99	-2,59	-2,28	-2,03	-1,82	-1,65	-1,44	-1,28	-1,14	-1,03	-0,94	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
мтл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,87	3,64	2,86	2,33	1,94	1,65	1,42	1,24	1,09	0,99	0,88	0,79	0,71	0,65	0,59	0,54
	Suction (kN/m²)	-7,04	-5,51	-4,48	-3,74	-3,20	-2,77	-2,44	-2,18	-1,96	-1,78	-1,62	-1,43	-1,28	-1,15	-1,04	-0,95
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60

TRIPLE SPAN



Core Thickness (mm)	Load Type kN/m²	Span length (L) (m)															
		1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
пл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	2,75	2,09	1,67	1,38	1,16	1,16	0,87	0,76	0,67	0,59	0,52	0,46	0,41	0,37	-	-
	Suction (kN/m²)	-4,21	-3,31	-2,46	-1,80	-1,39	-1,11	-0,92	-0,77	-0,66	-0,57	-0,50	-0,44	-0,40	-0,36	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
рл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,03	2,35	1,92	1,61	1,37	1,19	1,04	0,92	0,80	0,70	0,62	0,55	0,49	0,44	-	-
	Suction (kN/m²)	-4,87	-3,82	-2,84	-2,10	-1,62	-1,30	-1,06	-0,90	-0,77	-0,67	-0,59	-0,52	-0,47	-0,42	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
сл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,31	2,62	2,16	1,84	1,58	1,32	1,12	0,98	0,85	0,75	0,66	0,59	0,53	0,47	0,43	-
	Suction (kN/m²)	-5,36	-4,02	-3,18	-2,39	-1,85	-1,49	-1,22	-1,03	-0,89	-0,77	-0,67	-0,60	-0,54	-0,48	-0,44	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
ул	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,87	3,15	2,62	2,08	1,70	1,43	1,22	1,05	0,94	0,83	0,74	0,66	0,59	0,54	0,49	0,44
	Suction (kN/m²)	-5,81	-4,41	-3,52	-2,91	-2,32	-1,87	-1,54	-1,29	-1,11	-0,97	-0,85	-0,75	-0,67	-0,61	-0,55	-0,50
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
млл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,43	3,59	2,76	2,21	1,82	1,53	1,31	1,14	1,14	0,90	0,81	0,72	0,65	0,59	0,54	0,49
	Suction (kN/m²)	-6,24	-4,77	-3,83	-3,18	-2,72	-2,25	-1,85	-1,56	-1,33	-1,16	-1,01	-0,91	-0,81	-0,73	-0,66	-0,60
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
мнл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,99	3,75	2,89	2,33	1,93	1,63	1,40	1,22	1,08	0,97	0,87	0,78	0,71	0,64	0,59	0,54
	Suction (kN/m²)	-6,64	-5,11	-4,13	-3,44	-2,94	-2,57	-2,17	-1,83	-1,56	-1,35	-1,19	-1,05	-0,95	-0,85	-0,77	-0,70
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
мрл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5,39	3,97	3,09	2,50	2,08	1,77	1,53	1,34	1,18	1,05	0,96	0,87	0,79	0,72	0,65	0,60
	Suction (kN/m²)	-7,21	-5,60	-4,54	-3,81	-3,26	-2,85	-2,53	-2,23	-1,90	-1,65	-1,44	-1,28	-1,14	-1,03	-0,94	-0,85
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
мтл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5,56	4,11	3,21	2,61	2,18	1,85	1,60	1,41	1,24	1,11	1,11	0,92	0,83	0,76	0,69	0,64
	Suction (kN/m²)	-7,58	-5,90	-4,80	-4,03	-3,47	-3,03	-2,69	-2,42	-2,13	-1,85	-1,62	-1,43	-1,28	-1,15	-1,04	-0,95
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60

02/2026

Notes:

1 Steel thickness ext/int: 0,50/0,40mm
2 Values have been calculated using the method described in EN 14509, for color group 1 (very light colors)
3 Values have been calculated using the limit state method described in EN 14509: 2013. Taking imposed loads, temperature and creep into account.
4 The following deflection limits have been used:
Pressure loading L/200
Suction loading L/200
5 Design criteria Safety factors on loads: ULS 1.5 (variable) 1.35 (permanent) / SLS 1.
Safety factors on material: Wrinkling of face: ULS 1.25 / SLS
1.1. Shear of core: ULS 1.3 / SLS 1.08.
SLS Summer temperature: Outside 55°C / Inside 25°C,
Winter temperature: Outside -20°C / Inside -25°C.
6 In order to conduct the calculations some data from table E6 and rates originating from table E8 stipulated in a standard EN 14509 were applied.
7 The loads calculated in the load-span table are unfactored loads.
8 The actual wind suction resisted by the panel is dependent on the number of fasteners.
9 The fastener calculation should be carried out in accordance with the appropriate standards.
10 For intermediate values linear interpolation may be used.
11 The allowable steelwork tolerance between bearing planes of adjacent supports have to be aligned with EN1090-2.

AssanPanel

NOVA 5 (PIR) WALL PANEL LOAD SPAN TABLE

SINGLE SPAN

Core Thickness (mm)	Load Type kN/m²	Span length (L) (m)															
		1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
40	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,22	2,39	1,90	1,57	1,34	1,17	1,03	0,94	0,85	0,78	0,72	0,66	0,59	0,53	-	-
	Suction (kN/m²)	-4,15	-3,25	-2,43	-1,77	-1,35	-1,07	-0,88	-0,73	-0,61	-0,52	-0,45	-0,39	-0,35	-0,31	-	-
50	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,80	2,86	2,28	1,90	1,63	1,42	1,26	1,14	1,03	0,96	0,88	0,82	0,75	0,68	0,61	-
	Suction (kN/m²)	-4,81	-3,84	-2,81	-2,06	-1,58	-1,25	-1,02	-0,86	-0,72	-0,62	-0,53	-0,47	-0,41	-0,37	-0,33	-
60	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,36	3,30	2,66	2,22	1,91	1,67	1,49	1,34	1,22	1,12	1,03	0,97	0,91	0,83	0,75	0,68
	Suction (kN/m²)	-5,48	-4,40	-3,19	-2,35	-1,81	-1,44	-1,17	-0,99	-0,83	-0,71	-0,62	-0,54	-0,48	-0,42	-0,38	-0,34
80	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5,42	4,17	3,38	2,84	2,45	2,16	1,92	1,74	1,58	1,45	1,34	1,25	1,17	1,10	1,03	0,95
	Suction (kN/m²)	-6,62	-5,08	-3,95	-2,94	-2,27	-1,81	-1,48	-1,24	-1,05	-0,91	-0,79	-0,69	-0,61	-0,54	-0,48	0,00
100	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	6,44	5,00	4,08	3,45	2,99	2,63	2,35	2,13	1,94	1,79	1,65	1,54	1,44	1,35	1,27	1,20
	Suction (kN/m²)	-7,48	-5,80	-4,71	-3,52	-2,74	-2,19	-1,79	-1,50	-1,27	-1,09	-0,95	-0,84	-0,74	-0,66	-0,59	-0,53
120	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	7,44	5,82	4,77	4,05	3,51	3,10	2,78	2,51	2,30	2,11	1,96	1,82	1,71	1,60	1,51	1,43
	Suction (kN/m²)	-8,37	-6,54	-5,36	-4,11	-3,20	-2,56	-2,10	-1,76	-1,49	-1,28	-1,11	-0,98	-0,87	-0,77	-0,69	-0,62
150	a (mm)	45	42	41	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	8,91	7,02	5,79	4,93	4,29	3,80	3,41	3,09	2,82	2,60	2,41	2,25	2,10	1,98	1,87	1,77
	Suction (kN/m²)	-9,72	-7,66	-6,31	-4,98	-3,89	-3,13	-2,57	-2,15	-1,82	-1,57	-1,36	-1,19	-1,05	-0,95	-0,85	-0,77
170	a (mm)	50	47	45	44	43	43	42	42	41	41	41	41	40	40	40	40
	Pressure (kN/m²)	9,88	7,82	6,47	5,51	4,81	4,26	3,82	3,47	3,17	2,92	2,71	2,53	2,37	2,23	2,10	1,99
	Suction (kN/m²)	-10,63	-8,41	-6,95	-5,57	-4,36	-3,50	-2,88	-2,41	-2,04	-1,76	-1,53	-1,34	-1,18	-1,05	-0,96	-0,86

DOUBLE SPAN



Core Thickness (mm)	Load Type kN/m²	Span length (L) (m)															
		1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
пл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,22	2,39	1,90	1,57	1,34	1,09	0,70	0,41	0,23	-	-	-	-	-	-	-
	Suction (kN/m²)	-3,55	-2,53	-1,91	-1,50	-1,22	-1,02	-0,88	-0,73	-0,61	-	-	-	-	-	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
рл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,80	2,86	2,28	1,90	1,63	1,42	0,98	0,58	0,34	0,20	-	-	-	-	-	-
	Suction (kN/m²)	-3,80	-2,73	-2,08	-1,65	-1,34	-1,13	-0,98	-0,85	-0,72	-0,62	-	-	-	-	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
сл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,36	3,30	2,66	2,22	1,88	1,59	1,20	0,80	0,48	0,29	0,16	-	-	-	-	-
	Suction (kN/m²)	-4,04	-2,93	-2,24	-1,78	-1,46	-1,23	-1,05	-0,93	-0,82	-0,71	-0,62	-	-	-	-	-
	b (mm)	66	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
ул	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5,41	4,05	3,18	2,58	2,15	1,83	1,58	1,24	0,86	0,54	0,34	0,20	-	-	-	-
	Suction (kN/m²)	-4,51	-3,31	-2,56	-2,05	-1,69	-1,42	-1,22	-1,06	-0,96	-0,86	-0,77	-0,69	-	-	-	-
	b (mm)	81	70	63	60	60	60	60	60	60	60	60	60	60	60	60	60
млл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5,90	4,47	3,53	2,89	2,41	2,06	1,78	1,57	1,23	0,88	0,58	0,37	0,23	-	-	-
	Suction (kN/m²)	-4,95	-3,68	-2,86	-2,30	-1,90	-1,61	-1,38	-1,21	-1,07	-0,97	-0,88	-0,80	-0,73	-	-	-
	b (mm)	88	78	70	64	60	60	60	60	60	60	60	60	60	60	60	60
мнл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	6,36	4,86	3,87	3,17	2,66	2,28	1,98	1,74	1,54	1,20	0,88	0,60	0,40	0,26	-	-
	Suction (kN/m²)	-5,36	-4,02	-3,15	-2,55	-2,11	-1,79	-1,54	-1,34	-1,19	-1,06	-0,98	-0,89	-0,81	-0,75	-	-
	b (mm)	97	87	79	72	67	62	60	60	60	60	60	60	60	60	60	60
мрл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	7,01	5,40	4,33	3,57	3,01	2,58	2,24	1,98	1,76	1,58	1,35	1,35	0,71	0,49	0,34	0,22
	Suction (kN/m²)	-5,95	-4,51	-3,56	-2,89	-2,41	-2,04	-1,76	-1,54	-1,36	-1,22	-1,10	-1,10	-0,93	-0,86	-0,79	-0,74
	b (mm)	109	99	91	84	79	74	69	66	63	61	60	60	60	60	60	60
мтл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	7,42	5,75	4,62	3,82	3,23	2,77	2,42	2,13	1,90	1,71	1,55	1,25	0,97	0,69	0,48	0,34
	Suction (kN/m²)	-6,31	-4,81	-3,81	-3,11	-2,59	-2,20	-1,90	-1,66	-1,47	-1,32	-1,19	-1,08	-1,08	-0,93	-0,86	-0,80
	b (mm)	117	107	99	92	86	81	77	73	70	67	64	60	60	60	60	60

TRIPLE SPAN



Core Thickness (mm)	Load Type kN/m²	Span length (L) (m)															
		1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
пл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,22	2,39	1,90	1,57	1,34	1,17	0,98	0,70	0,51	0,39	0,30	0,24	-	-	-	-
	Suction (kN/m²)	-4,15	-3,11	-2,39	-1,77	-1,35	-1,07	-0,88	-0,73	-0,61	-0,52	-0,45	-0,39	-	-	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
рл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3,80	2,86	2,28	1,90	1,63	1,42	1,07	0,85	0,62	0,47	0,36	0,28	0,23	0,19	-	-
	Suction (kN/m²)	-4,51	-3,29	-2,55	-2,06	-1,58	-1,25	-1,02	-0,86	-0,72	-0,62	-0,53	-0,47	-0,41	-0,37	-	-
	b (mm)	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
сл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4,36	3,30	2,66	2,22	1,91	1,67	1,32	1,32	0,75	0,56	0,43	0,34	0,27	0,22	-	-
	Suction (kN/m²)	-4,73	-3,48	-2,70	-2,19	-1,81	-1,44	-1,17	-0,99	-0,83	-0,71	-0,62	-0,54	-0,48	-0,42	-	-
	b (mm)	66	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
ул	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5,42	4,16	3,38	2,84	2,45	2,16	1,88	1,32	1,32	0,78	0,60	0,47	0,37	0,30	0,24	0,20
	Suction (kN/m²)	-5,15	-3,82	-3,00	-2,45	-2,05	-1,76	-1,48	-1,24	-1,05	-0,91	-0,79	-0,69	-0,61	-0,54	-0,48	-0,43
	b (mm)	81	73	68	64	62	60	60	60	60	60	60	60	60	60	60	60
млл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	6,44	4,98	3,96	3,27	2,76	2,38	2,09	1,81	1,28	1,28	0,80	0,62	0,49	0,40	0,32	0,27
	Suction (kN/m²)	-5,55	-4,16	-3,28	-2,69	-2,26	-1,95	-1,70	-1,50	-1,27	-1,09	-0,95	-0,84	-0,74	-0,66	-0,59	-0,53
	b (mm)	98	90	81	75	70	66	63	60	60	60	60	60	60	60	60	60
мнл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	7,00	5,34	4,27	3,53	3,00	2,59	2,28	2,02	1,70	1,24	1,24	0,80	0,63	0,51	0,41	0,34
	Suction (kN/m²)	-5,94	-4,47	-3,55	-2,91	-2,46	-2,12	-1,86	-1,65	-1,48	-1,28	-1,11	-0,98	-0,87	-0,77	-0,69	-0,62
	b (mm)	109	98	90	83	78	74	71	68	60	60	60	60	60	60	60	60
мрл	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	7,62	5,85	4,71	3,91	3,33	2,89	2,54	2,26	2,04	1,77	1,32	1,32	0,88	0,71	0,57	0,47
	Suction (kN/m²)	-6,49	-4,93	-3,92	-3,24	-2,74	-2,36	-2,07	-1,84	-1,66	-1,50	-1,36	-1,19	-1,05	-0,95	-0,85	-0,77
	b (mm)	121	110	101	95	90	86	82	79	77	70	60	60	60	60	60	60
мтл	a (mm)	43	41	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	8,00	6,18	4,99	4,15	3,54	3,07	2,71	2,41	2,17	1,97	1,63	1,24	1,24	0,86	0,70	0,57
	Suction (kN/m²)	-6,83	-5,21	-4,16	-3,44	-2,91	-2,52	-2,21	-1,97	-1,77	-1,60	-1,46	-1,34	-1,18	-1,05	-0,96	-0,86
	b (mm)	128	117	109	102	97	93	89	86	83	81	69	60	60	60	60	60

02/2026

Notes:

1 Steel thickness ext/int: 0,50/0,40mm
2 Values have been calculated using the method described in EN 14509, for for color group 3 (Dark Colors)
3 Values have been calculated using the limit state method described in EN 14509: 2013. Taking imposed loads, temperature and creep into account.
4 The following deflection limits have been used:
Pressure loading L/100
Suction loading L/100
5 Design criteria Safety factors on loads: ULS 1.5 (variable) 1.35 (permanent) / SLS 1.
Safety factors on material: Wrinkling of face: ULS 1.25 / SLS
1.1. Shear of core: ULS 1.3 / SLS 1.08.
SLS Summer temperature: Outside 55°C / Inside 25°C,
Winter temperature: Outside -20°C / Inside -25°C.
6 In order to conduct the calculations some data from table E6 and rates originating from table E8 stipulated in a standard EN 14509 were applied.
7 The loads calculated in the load-span table are unfactored loads.
8 The actual wind suction resisted by the panel is dependent on the number of fasteners.
9 The fastener calculation should be carried out in accordance with the appropriate standards.
10 For intermediate values linear interpolation may be used.
11 The allowable steelwork tolerance between bearing planes of adjacent supports have to be alligned with EN1090-2