


W-UK Wall Panel

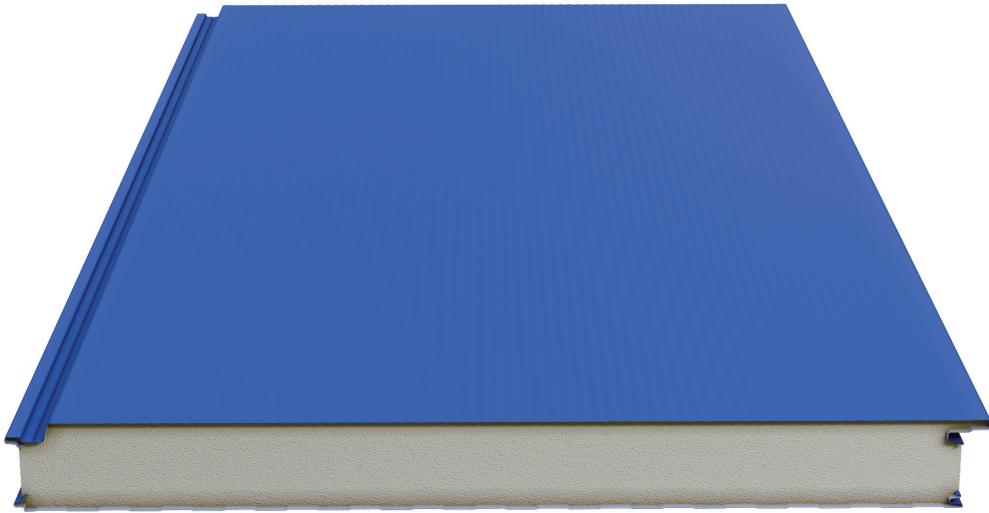

Product Information

The wall panels are suitable for use on walls due to the system that conceals joint elements. The ability to use them both laterally and vertically provides assembly flexibility and good solutions for designers. Generally produced in micro pressed form to achieve an aesthetic appearance for walls.

Production Plant

UK

Product Application

- Industrial Buildings
- Military Buildings
- Public Buildings
- Agricultural Buildings
- Sports Facilities
- Construction Site Buildings
- Silos
- Hypermarkets
- Shopping Centers
- Storehouse Halls
- Administrative Buildings

and all other concrete structures with steel or prefabricated load bearing systems.

Performance Advantages

Has the best thermal insulation values.

Fast and problem-free assembly saves time and labor.

The colorful surface eliminates the need for additional coatings like plaster and paint.


Color options available in the RAL catalogue.

Surface paint options available according to application (Polyester, PvdF, Plastisol, PVC).

Applicable both laterally and vertically.

The fastening elements being concealed provides visual advantage on walls.

Measurements

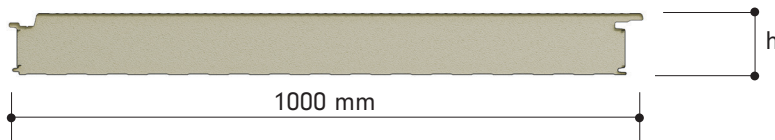

h: 40-50-60-80-100-120-140-160-180-200 mm

Modular Width	1,000 mm
Minimum Length	2 meters
Maximum Length	Depends on transport conditions.

SmartCore – PIR Properties

Density (EN 1602)	PIR: 40 (± 2) kg/m ³ & SmartCore: 41 (± 2) kg/m ³
Thickness	40-50-60-80-100-120-140-160-180-200 mm
Thermal Conductivity (EN 13165)	PIR: 0.022-0.024 & SmartCore: 0.018-0.019 W/mK
Reaction to Fire (13501)	PIR: B-s2,d0 & SmartCore: B-s2,d0

Thermal Conductivity Table for SmartCore Panels

Panel Thickness	U Thermal Conductivity (W/m ² K)	R Thermal Conductivity (m ² K/W)	R Thermal Conductivity (ft ² °F h/Btu)
40 mm	0,52	2,39	13,58
50 mm	0,42	2,95	16,74
60 mm	0,36	3,50	19,89
80 mm	0,24	4,61	26,20
100 mm	0,19	5,73	32,51
120 mm	0,15	6,84	38,82
140 mm	0,13	7,95	45,13
160 mm	0,11	9,06	51,44
180 mm	0,10	10,17	57,75
200 mm	0,09	11,28	64,05


The relevant values were calculated based on a value of 0.018 W/m²K.

Thermal Conductivity Table for PIR Panels

Panel Thickness	U Thermal Conductivity (W/m ² K)	R Thermal Conductivity (m ² K/W)	R Thermal Conductivity (ft ² °F h/Btu)
40 mm	0,63	1,99	11,29
50 mm	0,51	2,44	13,87
60 mm	0,43	2,90	16,45
80 mm	0,29	3,81	21,61
100 mm	0,23	4,72	26,77
120 mm	0,19	5,62	31,94
140 mm	0,16	6,53	37,10
160 mm	0,14	7,44	42,26
180 mm	0,12	8,35	47,42
200 mm	0,11	9,26	52,58

The relevant values were calculated based on a value of 0.022 W/m²K.

Metal Surfaces

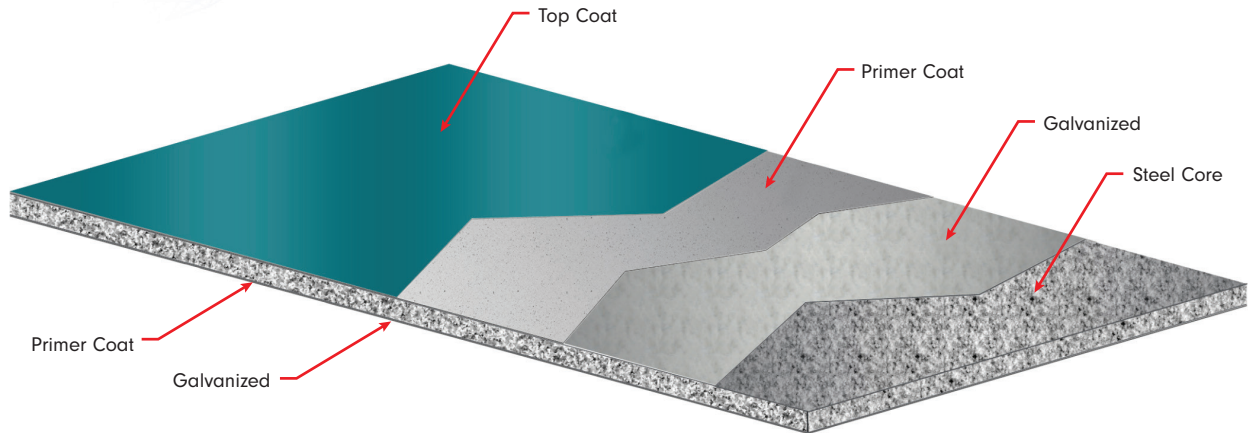

Prepainted Galvanized Steel Surface

Metal Type	Prepainted Galvanized Steel
External Facing Thickness	0.50-0.80 mm
Internal Facing Thickness	0.40-0.80 mm
Thickness Tolerance (EN 10143)	Nominal
Steel Quality (EN 10327)	Grade (S220GD+Z, S250GD+Z, S280GD+Z, S320GD+Z, S350GD+Z)
Paint Type	Polyester, PvdF, Plastisol


Tolerance Values

Panel Length	Panel Thickness	Panel Cover Width	Rectangularity
If $L \leq 3,000$ mm ± 5 mm If $L > 3,000$ mm ± 10 mm	$D \leq 100$ mm ± 2 mm	± 2 mm for all profiles	$s \leq 0.6\%$ of the nominal cover thickness (w). / (Width x 0.006)

Standard Package

Thickness (mm)	40	50	60	80	100	120	140	160	180	200
Quantity	20	18	14	10	9	8	7	6	5	4

Joint Details

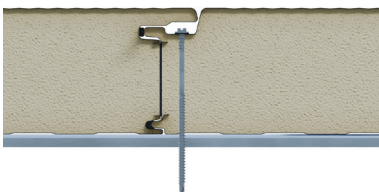

W WALL (PIR) PANEL LOAD SPAN TABLE																	
Core Thickness (mm)	Load Type kN/m²	Span length (L) (m)															
		1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
SINGLE SPAN	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3.73	2.59	1.90	1.45	1.15	0.94	0.77	0.65	0.55	0.48	-	-	-	-	-	-
	Suction (kN/m²)	-2.88	-2.00	-1.47	-1.12	-0.90	-0.72	-0.60	-0.50	-0.43	-0.37	-	-	-	-	-	-
	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4.69	3.26	2.39	1.83	1.45	1.17	0.98	0.82	0.70	0.60	0.52	-	-	-	-	-
	Suction (kN/m²)	-3.63	-2.52	-1.85	-1.42	-1.12	-0.91	-0.75	-0.63	-0.54	-0.46	-0.42	-	-	-	-	-
	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5.66	3.93	2.89	2.21	1.74	1.41	1.17	0.99	0.84	0.72	0.63	0.55	0.49	0.44	-	-
	Suction (kN/m²)	-4.38	-3.04	-2.23	-1.71	-1.35	-1.09	-0.91	-0.76	-0.65	-0.56	-0.49	-0.43	-0.38	-0.34	-	-
	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	6.62	4.60	3.38	2.59	2.04	1.65	1.37	1.15	0.99	0.85	0.74	0.65	0.57	0.51	-	-
	Suction (kN/m²)	-5.13	-3.56	-2.61	-2.00	-1.58	-1.28	-1.06	-0.90	-0.76	-0.66	-0.57	-0.50	-0.44	-0.40	-	-
DOUBLE SPAN	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	7.59	5.27	3.87	2.96	2.34	1.89	1.57	1.31	1.12	0.97	0.85	0.74	0.66	0.59	0.53	-
	Suction (kN/m²)	-5.88	-4.08	-3.00	-2.29	-1.81	-1.47	-1.21	-1.02	-0.87	-0.75	-0.66	-0.58	-0.51	-0.45	-0.41	-
	a (mm)	48	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	9.52	6.61	4.86	3.72	2.94	2.38	1.96	1.65	1.41	1.21	1.05	0.94	0.83	0.74	0.66	0.60
	Suction (kN/m²)	-7.37	-5.12	-3.76	-2.88	-2.27	-1.84	-1.52	-1.28	-1.09	-0.95	-0.82	-0.72	-0.64	-0.57	-0.51	-0.46
	a (mm)	60	49	41	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	11.45	7.95	5.84	4.47	3.53	2.86	2.36	1.99	1.69	1.46	1.27	1.11	1.11	0.89	0.80	0.72
	Suction (kN/m²)	-8.86	-6.16	-4.52	-3.46	-2.73	-2.21	-1.83	-1.54	-1.31	-1.13	-0.99	-0.87	-0.77	-0.69	-0.62	-0.56
	a (mm)	87	65	51	45	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	14.35	9.96	7.32	5.61	4.43	3.59	2.96	2.49	2.12	1.83	1.59	1.40	1.24	1.10	1.10	0.90
	Suction (kN/m²)	-11.11	-7.71	-5.67	-4.34	-3.43	-2.78	-2.29	-1.93	-1.64	-1.41	-1.23	-1.08	-0.97	-0.86	-0.77	-0.70
a (mm)	106	80	61	51	45	41	40	40	40	40	40	40	40	40	40	40	
Pressure (kN/m²)	16.29	11.30	8.31	6.36	5.03	4.07	3.36	2.83	2.41	2.07	1.81	1.59	1.41	1.25	1.12	1.01	
Suction (kN/m²)	-12.60	-8.75	-6.43	-4.92	-3.89	-3.15	-2.60	-2.19	-1.86	-1.60	-1.40	-1.23	-1.09	-0.98	-0.88	-0.79	
TRIPLE SPAN	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	3.73	2.59	1.90	1.45	1.15	0.94	0.77	0.65	0.55	0.48	-	-	-	-	-	-
	Suction (kN/m²)	-2.88	-2.00	-1.47	-1.12	-0.90	-0.72	-0.60	-0.50	-0.43	-0.37	-	-	-	-	-	-
	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	4.69	3.26	2.39	1.83	1.45	1.17	0.98	0.82	0.70	0.60	0.52	-	-	-	-	-
	Suction (kN/m²)	-3.63	-2.52	-1.85	-1.42	-1.12	-0.91	-0.75	-0.63	-0.54	-0.46	-0.42	-	-	-	-	-
	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	5.66	3.93	2.89	2.03	1.10	0.69	0.40	0.22	-	-	-	-	-	-	-	-
	Suction (kN/m²)	-4.38	-3.04	-2.23	-1.71	-1.04	-0.59	-0.26	-0.08	-	-	-	-	-	-	-	-
	a (mm)	94	76	63	60	60	60	60	60	60	60	60	60	60	60	60	60
	Pressure (kN/m²)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Suction (kN/m²)	-5.13	-3.56	-2.61	-2.00	-1.58	-1.58	-0.52	-0.24	-0.08	-	-	-	-	-	-	-
a (mm)	110	89	74	62	60	60	60	60	60	60	60	60	60	60	60	60	
QUAD SPAN	a (mm)	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Pressure (kN/m²)	7.59	5.27	3.87	2.96	2.33	1.91	1.57	1.31	1.12	0.97	0.85	0.74	0.66	0.59	0.53	-
	Suction (kN/m²)	-5.88	-4.08	-3.00	-2.29	-1.81	-1.37	-0.84	-0.45	-0.21	-0.07	-	-	-	-	-	-
	a (mm)	126	102	84	71	61	60	60	60	60	60	60	60	60	60	60	60
	Pressure (kN/m²)	49	41	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	Suction (kN/m²)	9.52	6.61	4.86	3.72	2.94	2.38	1.51	1.51	0.68	0.44	0.29	-	-	-	-	-
	a (mm)	78	63	60	60	60	60	60	60	60	60	60	60	60	60	60	60
	Pressure (kN/m²)	11.45	7.95	5.84	4.47	3.53	2.86	2.36	1.99	1.69	1.46	1.27	1.11	1.11	0.89	0.80	0.72
	Suction (kN/m²)	-8.86	-6.16	-4.52	-3.46	-2.73	-2.21	-1.83	-1.54	-1.31	-1.13	-0.99	-0.87	-0.77	-0.69	-0.62	-0.56
	a (mm)	145	115	94	78	66	60	60	60	60	60	60	60	60	60	60	60
	Pressure (kN/m²)	14.35	9.96	7.32	5.61	4.43	3.59	2.96	2.49	2.12	1.83	1.59	1.40	1.24	1.10	1.10	0.90
	Suction (kN/m²)	-11.11	-7.71	-5.67	-4.34	-3.43	-2.78	-2.29	-1.93	-1.64	-1.41	-1.23	-1.08	-0.97	-0.86	-0.77	-0.70
a (mm)	170	130	106	87	74	66	60	60	60	60	60	60	60	60	60	60	
Pressure (kN/m²)	16.29	11.30	8.31	6.36	5.03	4.07	3.36	2.83	2.41	2.07	1.81	1.59	1.41	1.25	1.12	1.01	
Suction (kN/m²)	-12.60	-8.75	-6.43	-4.92	-3.89	-3.15	-2.60	-2.19	-1.86	-1.60	-1.40	-1.23	-1.09	-0.98	-0.88	-0.79	

- Notes:
- Steel thickness ext/int: 0,50/0,40mm
 - Values have been calculated using the method described in EN 14509, for color group 3 (dark colors)
 - Values have been calculated using the limit state method described in EN 14509: 2013. Taking imposed loads, temperature and creep into account.
 - The following deflection limits have been used:
 - Pressure loading L/100
 - Suction loading L/100
 - Design criteria Safety factors on loads: ULS 1.5 (variable) 1.35 (permanent) / SLS 1.
 - Safety factors on material: Wrinkling of face: ULS
 - 1.25 / SLS 1.1. Shear of core: ULS 1.3 / SLS 1.08.
 - SLS Summer temperature: Outside 80°C / Inside 25°C,
 - Winter temperature: Outside -20°C / Inside -25°C.
 - In order to conduct the calculations some data from table E6 and rates originating from table E8 stipulated in a standard EN 14509 were applied.
 - The loads calculated in the load-span table are unfactored loads.
 - The actual wind suction resisted by the panel is dependent on the number of fasteners.
 - The fastener calculation should be carried out in accordance with the appropriate standards.
 - For intermediate values linear interpolation may be used.
 - The allowable steelwork tolerance between bearing planes of adjacent supports have to be aligned with EN1090-2

While every effort has been made to ensure the accuracy of the information provided in this document, Assan Panel and its subsidiaries accept no responsibility for any errors or for content that may be misleading. Any recommendations or descriptions regarding product use or application are offered for general guidance only. Assan Panel and its subsidiaries accept no liability in respect thereof. Assan Panel reserves the right to make changes to this document at any time without prior notice.